

SG-KB5200


Network Control Keyboard



Functions

- Touchscreen keyboard with the Android system.
- 10.1-inch capacitive touch screen, support local screen preview
- Four dimensional joystick control of PTZ functions
- Support H.265,H.264 codes decoding ,max 1ch 4K@30 or 4ch 1080P@30
- Compatible with Shogun cameras,storage devices,display control devices,and works with DSS Pro
- Support snapshot and recording to U-disk
- Support video-wall display control and schemes switches
- The buttons on the keyboard can be used to perform operations such as zoom, focus and tour, and can use the iris, wiper and presets.

Dimensions

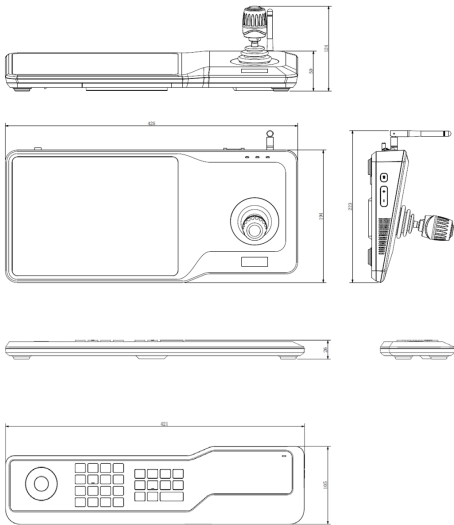

Technical Specification

Model

Model	SG-KB5200
-------	-----------

System

Main Processor	Embedded Processor
Operation System	ANDROID 7.1

Display

Video Output	1-ch VGA or 1-ch HDMI(extension decoding display 720P resolution)
Stream Type	H.265, H.264
Decoding Capability	1CH@4K(30fps)/4CH@1080P(30fps)/9CH@720P(30fps)
Joystick	4D joystick
Display split	1/4/9 splits, MxN splits
Screen	10.1" TFT LCD touch screen (1280*800)

Audio & Alarm

Audio controller	1 × volume button, 1 × mute button and touchscreen control
Loudspeaker	1 loudspeaker to play audio
Audio Input	1-ch 3.5 mm Jack
Audio Output	1-ch 3.5 mm Jack

General

Network Interface	1xRJ-45 port (10/100/1000M), WLAN
USB Interface	1 USB3.0, 2 USB2.0
WLAN	Support 2.4GHz (150Mbps transmission rate)
RS485	1 for ptz control
Maximum Number of Users	32 (including "admin")
Max RS485 Addresses (Each User)	8
Max Number of PTZ (IPC) That Can Be Added over Network (Each User)	1000

Environmental

Power Supply	12 VAC 4A max adapter , POE
Power Consumption	< 48 W
Working Temperature	-10°C ~+55°C
Working Humidity	10%~95%
Dimension	Host: 425mmx194mmx59mm (WxDxH) (exclude joystick) Mini Keypad: 421mmx105mmx26mm (WxDxH)