

# SG-A3120P

## 32 Channel Network Video Recorder



Pre-Install with  **Luxriot**®



### Overview

The Shogun A Series of NVR appliances are reliable integrated server and storage solutions for IP video surveillance. NVR appliances are open platform solutions that can be deployed with any of the leading IP cameras and video management software (VMS) for installations of any size from standalone units for retail stores to large scale deployments requiring hundreds of cameras and petabytes of storage. And it comes with software development kit (SDK).

### Functions

#### NVR Storage Appliance for IP Video Surveillance

The SG-A3120P is built to be the best video surveillance storage solution on the market. Delivering reliable and stable performance for surveillance video recording, especially when the arrays is in a critical state or during rebuild which is key to eliminating frame dropping, the SG-A3120P is ideal for installations of up to over a hundred full-HD IP cameras, making it perfect for banking, retail, gaming, manufacturing, and many more industries.

#### SmartBoost Technologies

A collection of unique features designed to provide the highest level of service and overcome performance bottlenecks to allow NVRs to handle a higher number of IP cameras than competing solutions.


#### Reduces Deployment Costs and Complexity

The SG-A3120P Series reduces support and equipment costs because there is no separate RAID storage unit to manage, eliminating the need for a server, controller cards, external cables, and a separate storage enclosure. Additionally, the SG-A3120P Series reduces interoperability conflicts caused when integrating different hardware

### Features

- Excellent value for a high-performance recording server system
- Perfect for up to 32 IP cameras
- Support H.265/H.264/MJPEG/MPEG4 compression
- Out of the box solution
- Support Liveview & Playback over Network
- 3-year warranty – can be extended to 5 years
- 1U 4-bay rackmount chassis
- Easy Expandability with iSCSI protocol
- Small-sized installations: retail stores, clinics, classrooms, gas stations

### Network Diagram

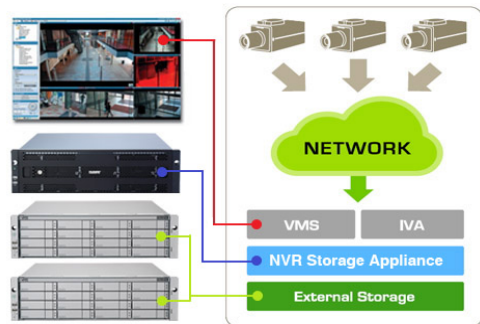

#### Easy to Use Management Interface

The SG-A3120P Series can be managed conveniently over the network connection using the user-friendly browser-based GUI, or the text-based command line network terminal interface. Alternatively you can manage it out-of-band with a VGA or HDMI monitor and USB keyboard to access the text-based command line interface.

#### Outstanding Track Record of Reliability

Reliability is paramount for surveillance deployments in order to protect property, assets or even the safety of individuals. The SG-A3120P features the RAID engine, which has been battle-tested in countless mission critical applications around the globe. With its incredible track record for reliable video data management and storage, the SG-A3120P is ideal for users requiring an extremely reliable and safe data center for video archive protection.



# SG-A3120P

## 32 Channel Network Video Recorder

### Technical Specifications

**Model** SG-A3120P

#### General Information

Camera Range <sup>1</sup>	32
Form Factor	1U, 19" Rackmount
Number Of Drives	4 Drives
Drive Type	Hot Swappable 3.5" Enterprise SATA HDD 6Gbs. Optional 2.5" Enterprise SATA SSD
Internal Storage	M.2 SSD 128GB (Standard) or M.2 128GBx2 OS RAID (Optional)"
System Processor	Intel® Core™ i3-9100E
System Memory	2 x 8GB DDR4 Default (Max 64GB)"
Storage Expansion	Optional PROMISE Vess R and Vess J series via iSCSI

#### Interfaces

NIC Port	2 x Gigabit Ethernet
USB Port	Front: 1 x USB 3.0, Back: 4 x USB 3.0, 2 x USB 2.0
PCI Express Ports	1 x PCIe3.0 x8 (available only when OS RAID card is not present)
Graphic Interface	1 x D-sub VGA, 1 x Display Port, 1 x HDMI*
Audio I/O	3 x 3.5mm Audio Jack
Optical S/PDIF	Yes

#### RAID Operational Feature

RAID Levels	0, 1, 1E, 3, 5, 6, 10 (0+1)
Hot Spares	Hot-spare drives with revertible option

#### Software

OS Supported (64-bit)	Windows 11, Windows Server 2022
Management Tools	Graphical UI/SNMP via Ethernet, CLI via Ethernet or Graphics, OPAS Service via USB, SDK or API for Integration
Optimization Technologies	SMARTBOOST(TM) Storage for Video Surveillance optimization
Event Notification	Email, SNMP (V1/V2/V3), Buzzer, LEDs
Protocols	HTTP, HTTPS, TCP/IP, IPv4, IPv6, NTP, DHCP, DNS, SMTP, UPnP, 802.1x, DDNS, RTSP, SNMP, Multicast, iSCSI

#### System Information

AC Input	100 ~ 240 VAC, 60 ~ 50Hz
Current (Maximum)	4-2A@ 100-240Vac @full load
Power Supply	250W Single ATX
Temperature	5° ~ 40°C (-40° ~ 60°C non-operational)
Dimensions (H x W x D)	44.2 x 446.4 x 398 mm / 1.74" x 17.57" x 15.67"
Weight	W/o HDD: ~6.48 kg (~14.29 lbs) W/ HDD: ~9.16 kg (~20.19 lbs)