


# SG-IP Speaker

Outdoor IP Public Announcement

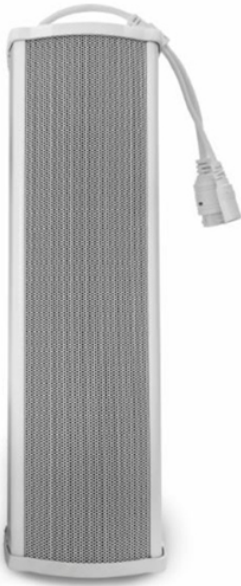

## Functions

- Support wired, 4G networking (optional)
- Support 1 I/O external trigger broadcast (optional)
- 512M memory chip (optional, 4G model recommended)
- TTS text-to-voice broadcasting
- Timed broadcast
- Real-time broadcast
- Zoned broadcast
- Voice broadcast
- High sound quality loudspeakers
- IP network architecture, cross-network segment, cross-routing
- IP66 rating protection

## Technical Specification

Processor	High performance embedded SOC
Operation System	Embedded LINUX
Rate power	40 watts (max)
Compression	G.711, G.713, GSM, PCM
Audio output	Built-in speaker + Line OUT
Ethernet	1 x RJ45 (10/100 Mbps self-adaptive)
Network Protocol	TCP/IP, DNP
Power Supply	12VDC, 3A
Operation Temperature	-30 to 70 °C

