


# SG-PDUXX-C

## Power Distribution Unit with Breaker Cover




Power Cord

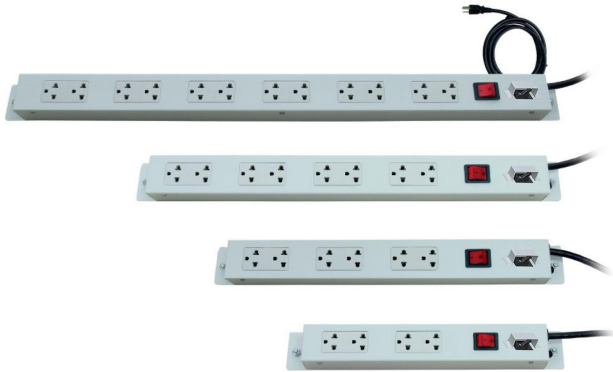

Socket



Electronic Circuit Breaker



Suppression



TIS 2432-2555

### Applications

Provide universal outlet which is suitable for network equipment, computer, etc.

### Specifications

- Housing made from Electro-Galvanized sheet steel, light gray color Electrostatic power coating.
- Load current : 15A 220VAC, 1, 50Hz.
- AC Socket Strip with electronic circuit breaker or Miniature circuit breaker (Optional), Line Suppression and Surge protection.
- Indicator light on the ON-OFF switch to show ON-OFF Status.
- Provided 2.5 sq.mm.(14 AWG) cable 3C, 3 m. with universal plug with ground type.
- The interior is reinforced with PVC insulation material, thickness 1 mm, formed from an industrial factory to insulate the electromagnetic field or leakage current from the Copper Bar to external materials.
- Available in various sizes 4, 6, 8 and 12 Outlets strip.
- Have a steel frame block the circuit breaker to protect the touch from being accidentally hit.
- Cable is compiled with UL E150631, Plug is compiled with UL E147650 standard.
- Assembly and Distribution by ISO 9001:2008 company.

### Ordering Information

- SG-PDU04-C : 4 Outlet Power Distribution Unit
- SG-PDU06-C : 6 Outlet Power Distribution Unit
- SG-PDU08-C : 8 Outlet Power Distribution Unit
- SG-PDU12-C : 12 Outlet Power Distribution Unit